



## JOHN DEERE TRACTEURS AGRICOLES - Neuf (Ref : 3607)

# 5075e 75hp - 4wd 2.9 L

Turbo Diesel, 6 Cylindres  | CC : 2900 | CVDIN : 75 | Portes : 0 | Places : 1 | Manuelle 4x4

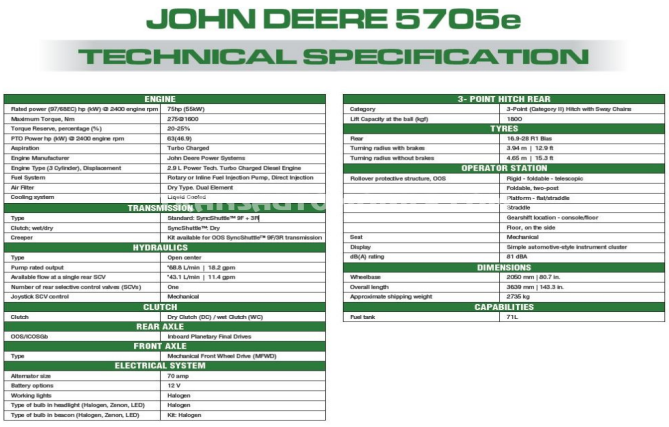

JOHN DEERE 5705e

TECHNICAL SPECIFICATION

| ENGINE | |
|---|---|
| Rated power (97/68EC) hp (kW) @ 2400 engine rpm | 75hp (55kW) |
| Maximum Torque, Nm | 275@1600 |
| Torque Reserve, percentage (%) | 20-25% |
| PTO Power hp (kW) @ 2400 engine rpm | 63(46.9) |
| Aspiration | Turbo Charged |
| Engine Manufacturer | John Deere Power Systems |
| Engine Type (3 Cylinder), Displacement | 2.9 L. Power Tech. Turbo Charged Diesel Engine |
| Fuel System | Rotary or Inline Fuel Injection Pump, Direct Injection |
| Air Filter | Dry Type. Dual Element |
| Cooling system | Liquid Cooling |
| **TRANSMISSION** | |
| Type | Standard: SyncShuttle™ 9F + 3R |
| Clutch; wet/dry | SyncShuttle™. Dry |
| Creeper | Kit available for OOS SyncShuttle™ 9F/3R transmission |
| **HYDRAULICS** | |
| Type | Open center |
| Pump rated output | *66.8 L/min \| 18.2 gpm |
| Available flow at a single rear SCV | *43.1 L/min \| 11.4 gpm |
| Number of rear selective control valves (SCVs) | One |
| Joystick SCV control | Mechanical |
| **CLUTCH** | |
| Clutch | Dry Clutch (DC) / wet Clutch (WC) |
| **REAR AXLE** | |
| Type | Inboard Planetary Final Drives |
| **FRONT AXLE** | |
| Type | Mechanical Front Wheel Drive (MFWD) |
| **ELECTRICAL SYSTEM** | |
| Alternator size | 70 amp |
| Battery options | 12 V |
| Working lights | Halogen |
| Type of bulb in headlight (Halogen, Zenon, LED) | Halogen |
| Type of bulb in beacon (Halogen, Zenon, LED) | Kit: Halogen |

| 3- POINT HITCH REAR | |
|---|---|
| Category | 3-Point (Category II) Hitch with Sway Chains |
| Lift Capacity at the ball (kgf) | 1800 |
| **TYRES** | |
| Rear | 16.9-28 R1 Blue |
| Turning radius with brakes | 3.94 m \| 12.9 ft |
| Turning radius without brakes | 4.65 m \| 15.3 ft |
| **OPERATOR STATION** | |
| Rollover protective structure, OOS | Rigid - foldable - telescopic |
| | Foldable, two-post |
| | Platform - flat/straddle |
| | Straddle |
| | Gearshift location - console/floor |
| | Floor, on the side |
| Seat | Mechanical |
| Display | Simple automotive-style instrument cluster |
| dB(A) rating | 81 dBA |
| **DIMENSIONS** | |
| Wheelbase | 2050 mm \| 80.7 in. |
| Overall length | 3639 mm \| 143.3 in. |
| Approximate shipping weight | 2736 kg |
| **CAPABILITIES** | |
| Fuel tank | 71L |

Les spécifications peuvent varier selon l'année et l'origine du véhicule.
Nos conditions générales de vente sont disponibles sur www.transautomobile.com.
Photos non contractuelles.

Nos services

Transport  Assurance  Pièces détachées

**Tel : +32 (0)2 352 01 31 - Fax : +32 (0)2 352 01 52 - info@transauto.be - www.transautomobile.com**